


# 4 FACTS WHY OVERHEAD CONVEYOR TECHNOLOGY IS BETTER WITH XIROS®

## DRY-RUNNING

Our ball bearings are 100% dry-running. This keeps the bearing clean and dust adhesion has no chance. In addition, the running surfaces are covered. Because the bearing does not have to overcome the resistance of an external lubricant, the breakaway torque is significantly lower.

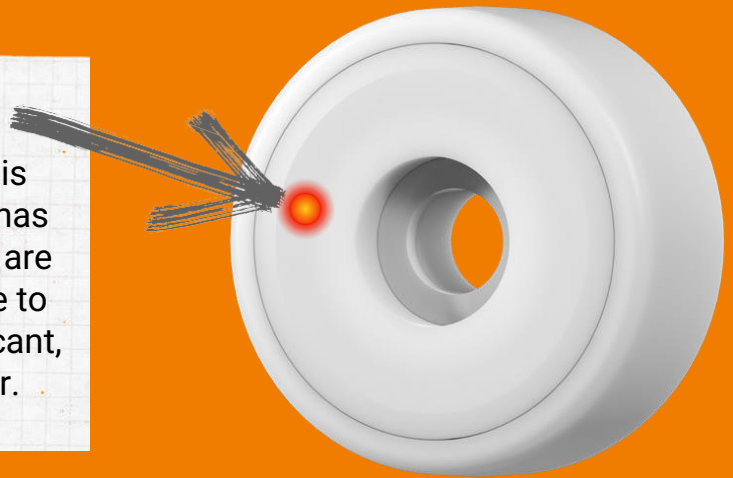


## HIGH LOAD CAPACITY

Double-row instead of single-row rolling elements provide higher load carrying capacity and good curve load capacity during the overhead conveying process.



## CUSTOMIZED

You decide! Customized dimensions and profiles possible - whether convex, concave, spherical or with U-profile, for example.

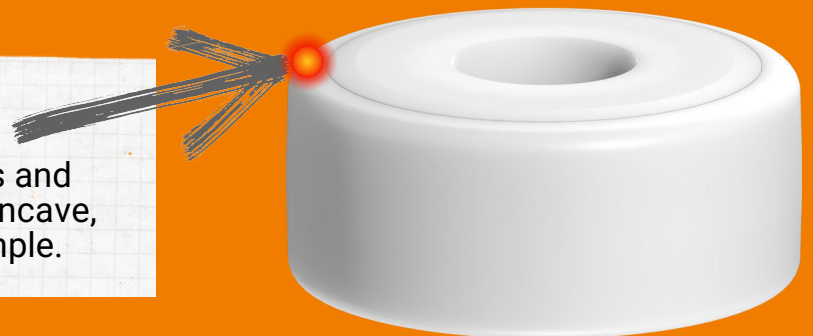

## FUNCTION INTEGRATION

igus® experience and molding capabilities means the path to integrated custom solutions is faster and more efficient.

