

# e-chain® system E2/000


## Selection Guide

### e-chain® opener

Reduce assembly time from 33 to 2 sec.




**E2/000: e-chain®**  
Standard for Systems E2  
snap-open along the outer radius  
from both sides

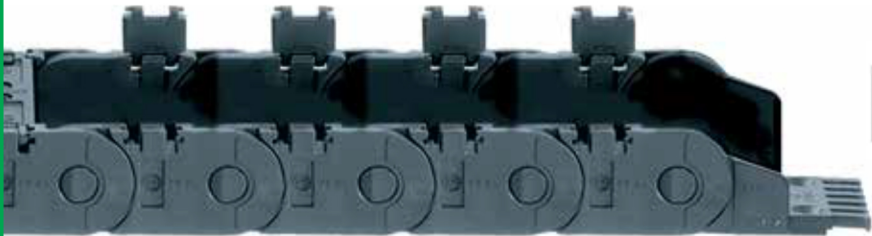

Series	Inner height <i>hi</i>		Inner width <i>Bi</i>		Outer width <i>Ba</i>		Outer height <i>ha</i>		Bending radius <i>R</i>	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1500	.83	(21)	.59-4.92	(15 - 125)	1.12-5.45	(28.5 - 138.5)	1.10	(28)	1.38-7.09	(35 - 180)
2500	.98	(25)	.98-4.92	(25 - 125)	1.61-5.55	(41.0 - 141.0)	1.38	(35)	2.44-9.84	(55 - 250)
2700	1.38	(35)	1.97-6.89	(50 - 175)	2.60-7.64	(66.0 - 194.0)	1.97	(50)	2.48-9.84	(63 - 250)
3500	1.77	(45)	1.97-9.84	(50 - 250)	2.76-10.63	(70.0 - 270.0)	2.52	(64)	2.95-11.81	(75 - 300)
255	.94	(24)	1.50-4.06	(38 - 103)	2.13-4.69	(54.0 - 119.0)	1.38	(35)	2.17-9.84	(55 - 250)



**E2/000: e-chain®**  
snap-open along the outer radius  
from both sides

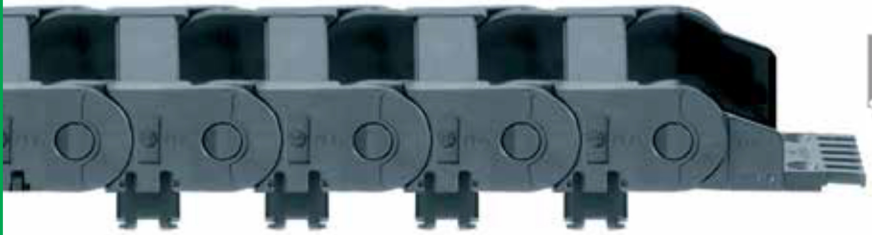

Series	Inner height <i>hi</i>		Inner width <i>Bi</i>		Outer width <i>Ba</i>		Outer height <i>ha</i>		Bending radius <i>R</i>	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1400	.83	(21)	.59-4.92	(15 - 125)	1.12-5.45	(28.5 - 138.5)	1.10	(28)	1.38-7.09	(35 - 180)
2400	.98	(25)	.98-4.92	(25 - 125)	1.61-5.55	(41.0 - 141.0)	1.38	(35)	2.44-9.84	(55 - 250)
2600	1.38	(35)	1.97-6.89	(50 - 175)	2.60-7.64	(66.0 - 194.0)	1.97	(50)	2.48-9.84	(63 - 250)
3400	1.77	(45)	1.97-9.84	(50 - 250)	2.76-10.63	(70.0 - 270.0)	2.52	(64)	2.95-11.81	(75 - 300)



**E2/000: Half e-tubes**  
snap-open along the outer radius  
from both sides



Series	Inner height <i>hi</i>		Inner width <i>Bi</i>		Outer width <i>Ba</i>		Outer height <i>ha</i>		Bending radius <i>R</i>	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1450	.83	(21)	.59-4.92	(15 - 125)	1.12-5.45	(28.5 - 138.5)	1.10	(28)	2.95-7.09	(75 - 180)
2450	.98	(25)	.98-4.92	(25 - 125)	1.61-5.55	(41.0 - 141.0)	1.38	(35)	2.95-9.84	(75 - 250)
2650	1.38	(35)	1.97-6.89	(50 - 175)	2.60-7.64	(66.0 - 194.0)	1.97	(50)	3.94-9.84	(100 - 250)
3450	1.77	(45)	1.97-9.84	(50 - 250)	2.76-10.63	(70.0 - 270.0)	2.52	(64)	4.92-11.81	(125 - 300)



**E2/000: Full e-tubes**  
snap-open along the outer radius  
from both sides



Series	Inner height <i>hi</i>		Inner width <i>Bi</i>		Outer width <i>Ba</i>		Outer height <i>ha</i>		Bending radius <i>R</i>	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
1480	.83	(21)	.59-4.92	(15 - 125)	1.12-5.45	(28.5 - 138.5)	1.10	(28)	2.95-7.09	(75 - 180)
2480	.98	(25)	.98-4.92	(25 - 125)	1.61-5.55	(41.0 - 141.0)	1.38	(35)	2.95-9.84	(75 - 250)
2680	1.38	(35)	1.97-6.89	(50 - 175)	2.60-7.64	(66.0 - 194.0)	1.97	(50)	3.94-9.84	(100 - 250)
3480	1.77	(45)	1.97-9.84	(50 - 250)	2.76-10.63	(70.0 - 270.0)	2.52	(64)	4.92-11.81	(125 - 300)